
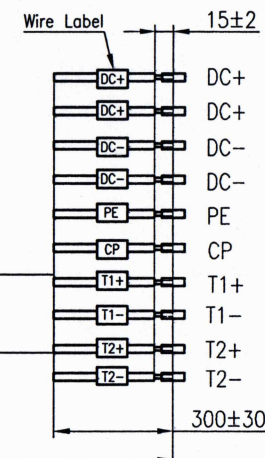
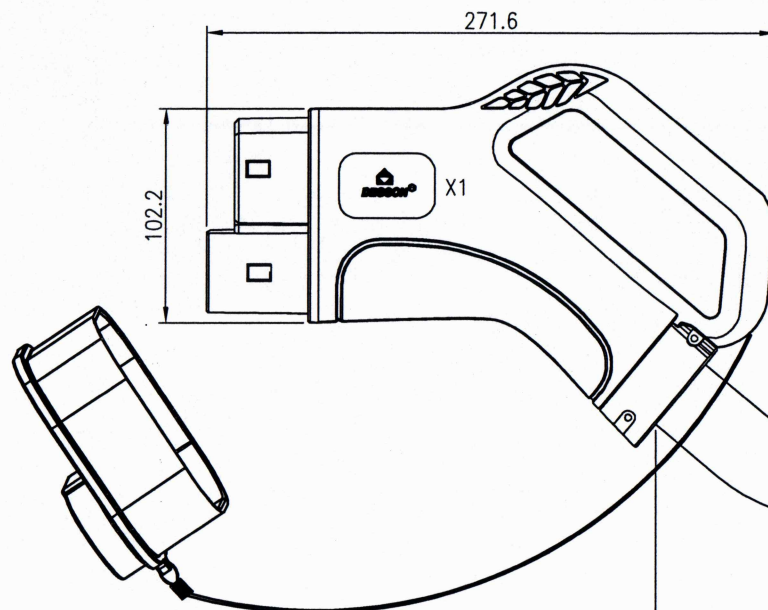
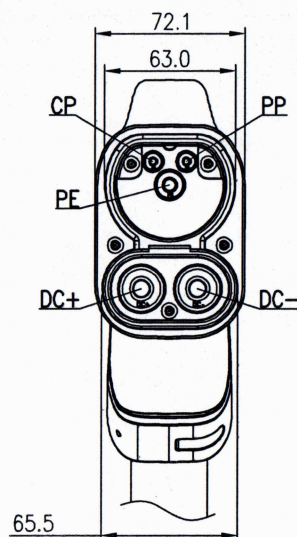


未注公差/General tolerances(mm)


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
3	6	10	18	30	50	80	120	180	250	315	400	500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

0.1/10  
±2°

Wiring diagram

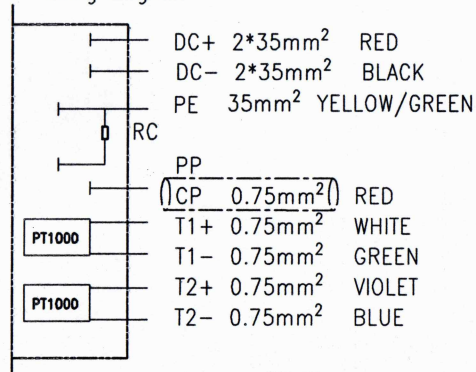

RC=1500Ω±3%    Shielded wire

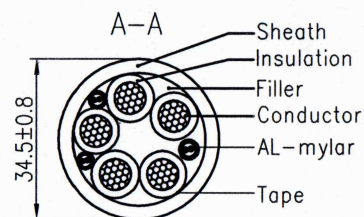

X1

Laser Printing Front Note:

**DEGSON®**

Laser Printing Back Note(Arial) :

MEDC-T-250A-V-03-5.0M-82AH

250A 1000V DC

IEC 62196-3:2022

IP54

20xxxxxx-xxxx

**CE**

(D0-2)

额定电压/Rated voltage/Current	1000V DC;250A
绝缘电阻/Insulation resistance	>500MΩ,1000V DC 1min
耐压/Withstanding voltage	DC+, DC- and PE, 3500V AC 1min
	PP and CP 1500V AC 1min
防护等级/Ingress protection	IP54
插拔寿命/Insertion/Pullout times	10,000 Times
插拔力/Insertion/Pullout force	<100N
使用温度范围/Operating temperature(°C)	-30°C~+50°C
线材规格/Cable specification	4*35mm²+35mm²+6*0.75mm² Black
标准/Reference standard	IEC 62196-3:2022
符合RoHS环保要求/Conform to RoHS	Yes

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:	
APPD: <i>Renk</i> 2024.05.06		MAT NO./REV:	/ D0-2	
CHKD: <i>Zhou</i> 2024.05.06		NAME:	MEDC-T-250A-V-03-5.0M-82AH	
DRFT: Rong QX	2024.05.06	DRAWING NO.	TYPE	DRAWING STATUS
⊕	⊖	A4	CUSTOMER DRAWING	SCALE
		mm		1:3
		inch		1/1

(D0-2)

Update The Drawing

Rong QX

2024.05.06

DRFT: Rong QX

2024.05.06

DRAWING NO.

TYPE

DRAWING STATUS

SCALE

SHEET

REV

ECN

DESCRIPTION

DRFT

DATE

A4

CUSTOMER DRAWING

1:3

1/1