


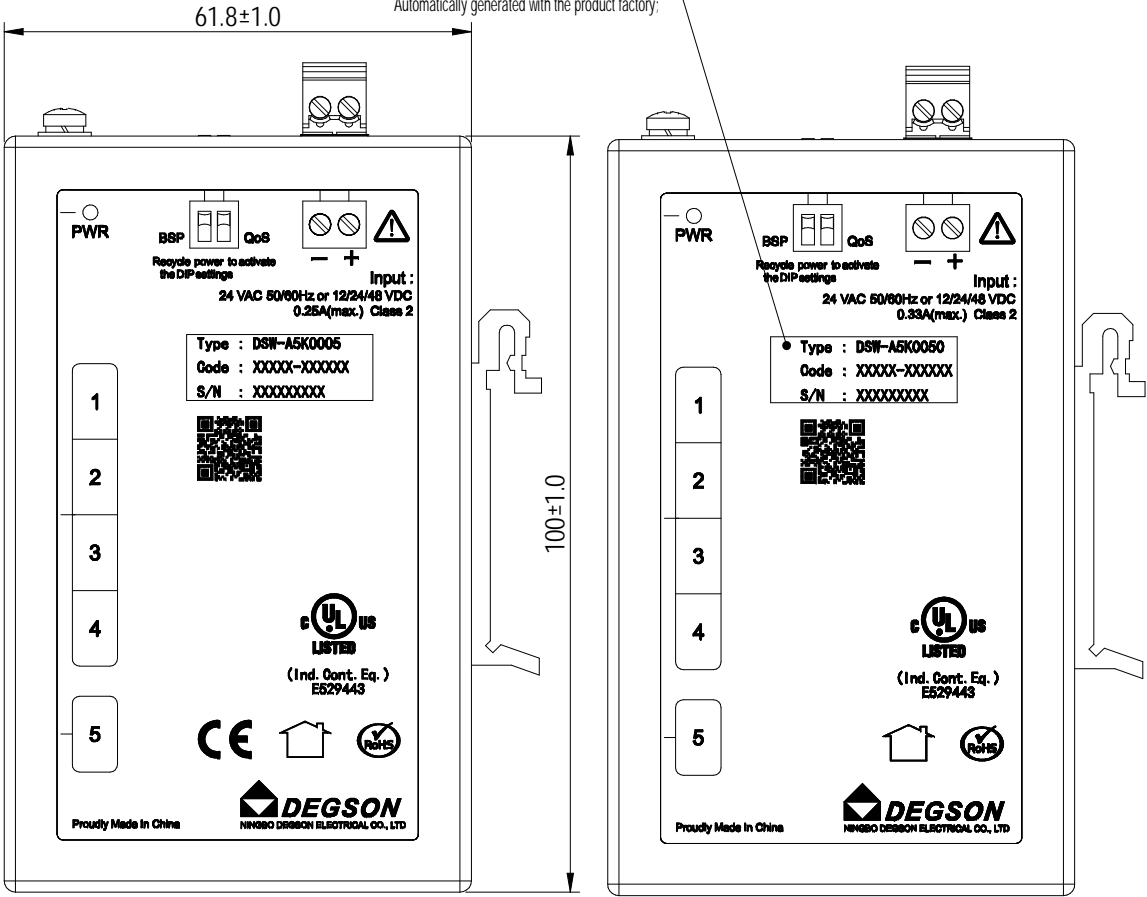
未注公差/General tolerances (mm)													
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
端口数/Port number												5	
防护等级/Protection Degree												IP30	
工作温度/Operating temperature												-40~+75℃	
电源/Power												24 VAC 50/60Hz or 12/24/48 VDC	
安装方式/Installation mode												DIN35mm	
印字为激光打标，印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect													

标签丝印模板
Label silk screen printing template

DSW-A5K0005

DSW-A5K0050
DSW-A5K0104

产品序号
随产品出厂自动生成：
Product serial number
Automatically generated with the product factory;

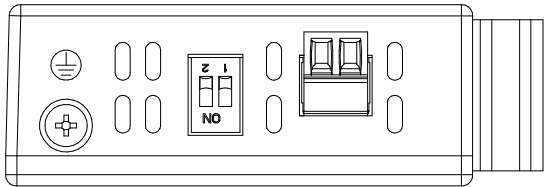
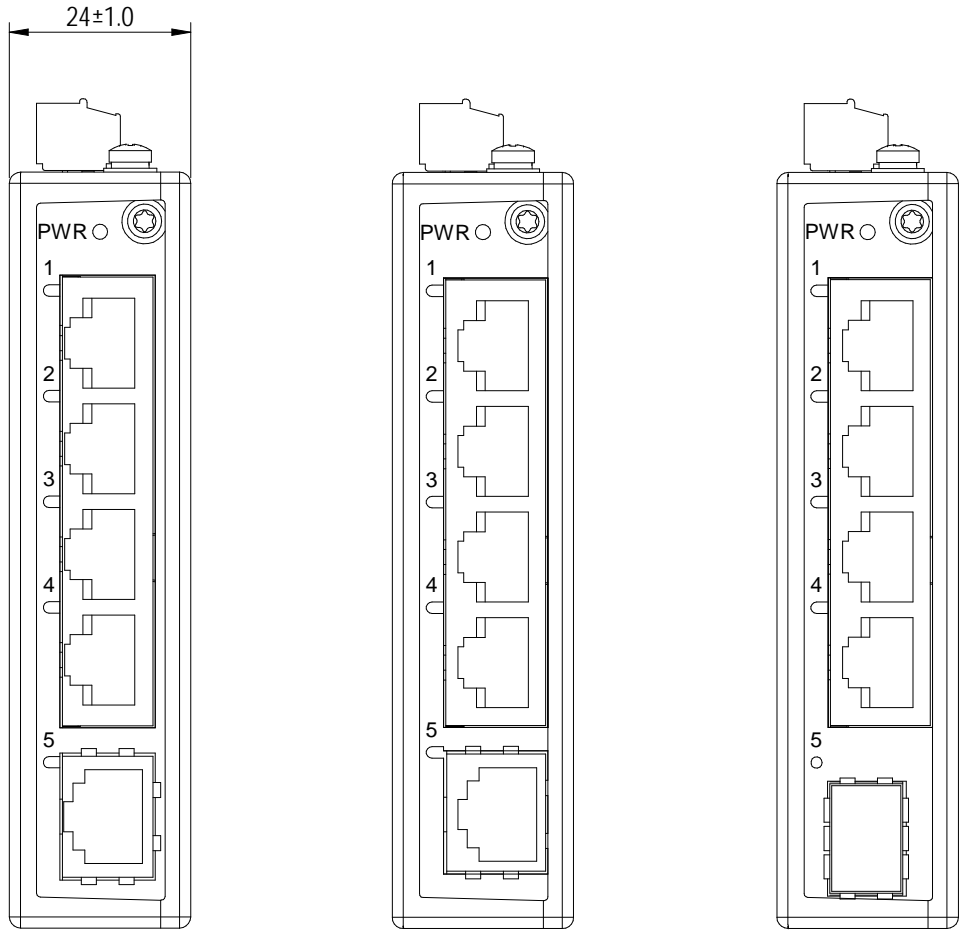





网口处丝印视图
Silk-screen view of a network port

DSW-A5K0005

DSW-A5K0050

DSW-A5K0104



			MATERIAL:			SURFACE/COLOR:		
APPD: LGL			MAT NO./REV:			MAT STATUS: 批量		
CHKD: MEK			NAME					
DRFT: GXJ			DSW-A5KXXXX					
2025.01.20			DRAWING NO.		TYPE		DRAWING STATUS	
2025.01.20			200278264		CUSTOMER DRAWING		SCALE	
2024.12.16							2:1	
 A3			 (inch)				SHEET	
							1/1	

01		Changed: EAC authentication was removed	GXJ	2024.12.16
REV	ECN	DESCRIPTION	DRFT	DATE